AD 685382

Geophysical Data Report

ATMOSPHERIC RADIO NOISE DATA BANGKOK, THAILAND — September-November 1967

By: RANGSIT CHINDAHPORN PONSAK BUASRI

Prepared for:

U.S. ARMY ELECTRONICS COMMAND
FORT MONMOUTH, NEW JERSEY 07703

CONTRACT DA-36-039 AMC-00040(E)
ORDER NO. 5384-PM-63-91

Distribution of this document is unlimited.

Sponsored By
ADVANCED RESEARCH PROJECTS AGENCY
ARPA ORDER 371
FOR THE
THAI-U.S. MILITARY RESEARCH AND DEVELOPMENT CENTER
SUPREME COMMAND HEADQUARTERS
BANGKOK, THAILAND

STANFORD RESEARCH INSTITUTE
MENLO PARK, CALIFORNIA

20

DISCLAIMER NOTICE

THIS DOCUMENT IS THE BEST QUALITY AVAILABLE.

COPY FURNISHED CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

STANFORD RESEARCH INSTITUTE
MENLO PARK, CALIFORNIA

December 1967

Geophysical Data Report

ATMOSPHERIC RADIO NOISE DATA BANGKOK, THAILAND — September-November 1967

Prepared for:

U.S. ARMY ELECTRONICS COMMAND
FORT MONMOUTH, NEW JERSEY 07703

CONTRACT DA-36-039 AMC-00040(E)
ORDER NO. 5384-PM-63-91

By: RANGSIT CHINDAHPORN PONSAK BUASRI

SRI Project 4240

Sponsored By
ADVANCED RESEARCH PROJECTS AGENCY
ARPA ORDER 371
FOR THE
THAI-U.S. MILITARY RESEARCH AND DEVELOPMENT CENTER
SUPREME COMMAND HEADQUARTERS
BANGKOK, THAILAND

Copy No. 159

CONTENTS

ILLUSTRATIONS

TABLES

I INTRODUCTION

Measurements of atmospheric radio noise are being made by the Electronics Laboratory of the Military Research and Development Center (~~MRDC~~-EL), a joint Thailand-United States-orgunization in Bangkok. The noise-measuring equipment (~~Fig. 1~~), modeled after the U.S. National Bureau of Standards Radio Noise Recorder, Model ARN-2, is located near the village of Laem Chabang (~~Fig. 2~~), about 90 kilometers southeast of Bangkok, in order to minimize interference from man-made noise. A view of the site, showing the stundard ARN-2 antenna and ground plane, is presented in Fig. 3.

The cooperation and participation of the staff members of the Thailand Ministry of Defense and the support of the United States Advanced Research Projects Agency and the U.S. Army Electronics Command, have made it possible for the data presented in this report to be accumulated.

Tables I and II, below, present information about the site and the equipment.

For convenience in applying the results in this study, a nomogram for transforming effective antenna noise figure to noise field strength as a function of frequency is presented in Fig. 4.

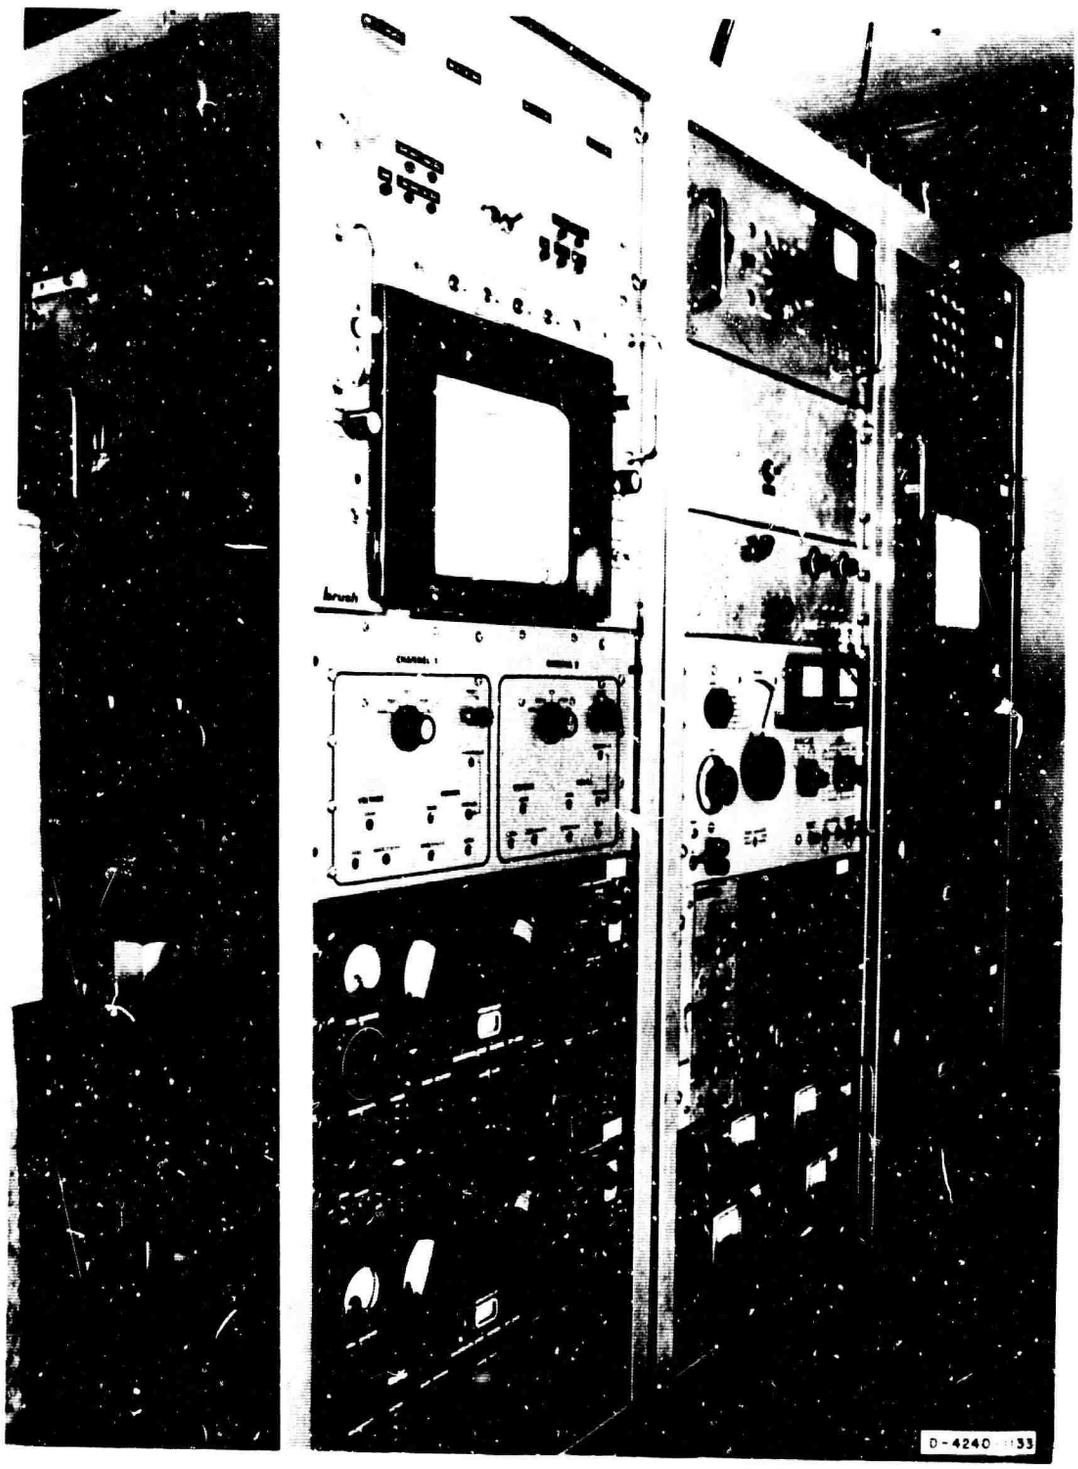

FIG. 1 ARN--3 ATMOSPHERIC RADIO NOISE MEASURING EQUIPMENT

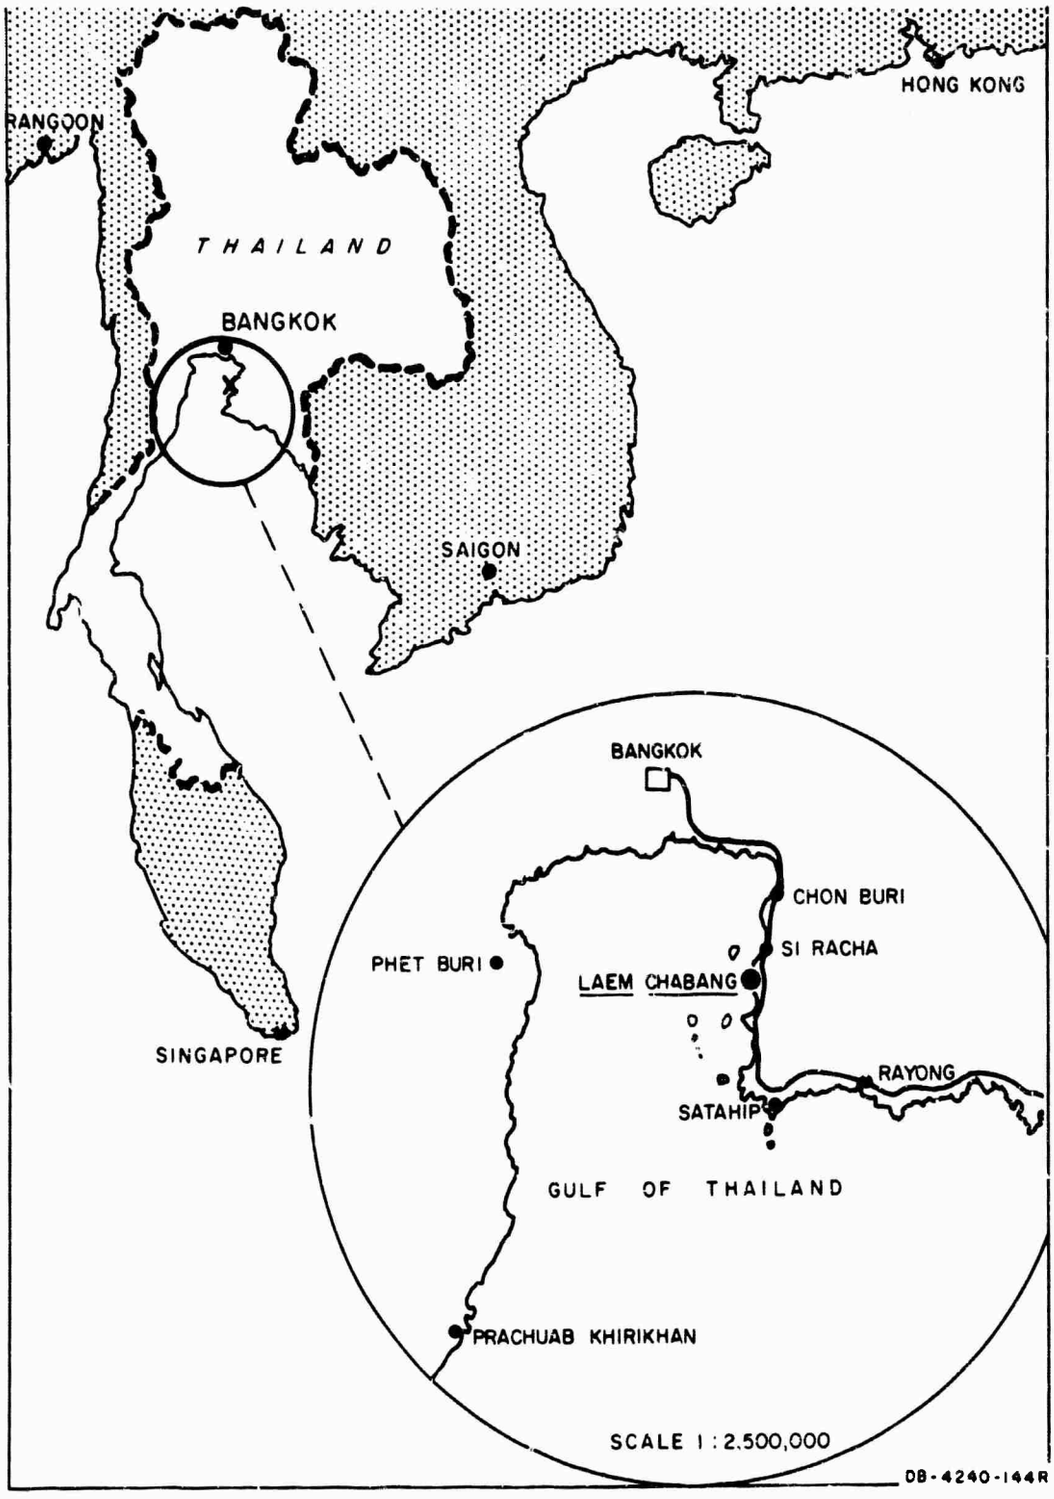

FIG. 2 LOCATION OF THE RADIO NOISE RECORDING STATION AT LAEM CHABANG, THAILAND

FIG. 3 RADIO NOISE RECORDING STATION

Table I

RADIO NOISE MEASURING SITE AT
LAEM CHABANG THAILAND

GEOGRAPHIC LOCATION		ELEVATION ANGLE OF HORIZON
Latitude	Longitude	
13.55°N	100.90°E	Less than 3 degrees in all directions; zero degrees towards the west (Gulf of Thailand)

Table II

ARN-3 RADIO NOISE RECORDER SPECIFICATIONS

Antenna	Standard 6.6294-meter (21.75 feet) vertical antenna with ground plane consisting of ninety radial wires, each approximately 100 feet long.
Frequencies of Measurement	6, 13, 27, 100, 530, 2,300, 5.000, and 10,000 kHz.
Effective noise bandwidth of receiver	200 Hz
Recording chart speed	5 cm per hour

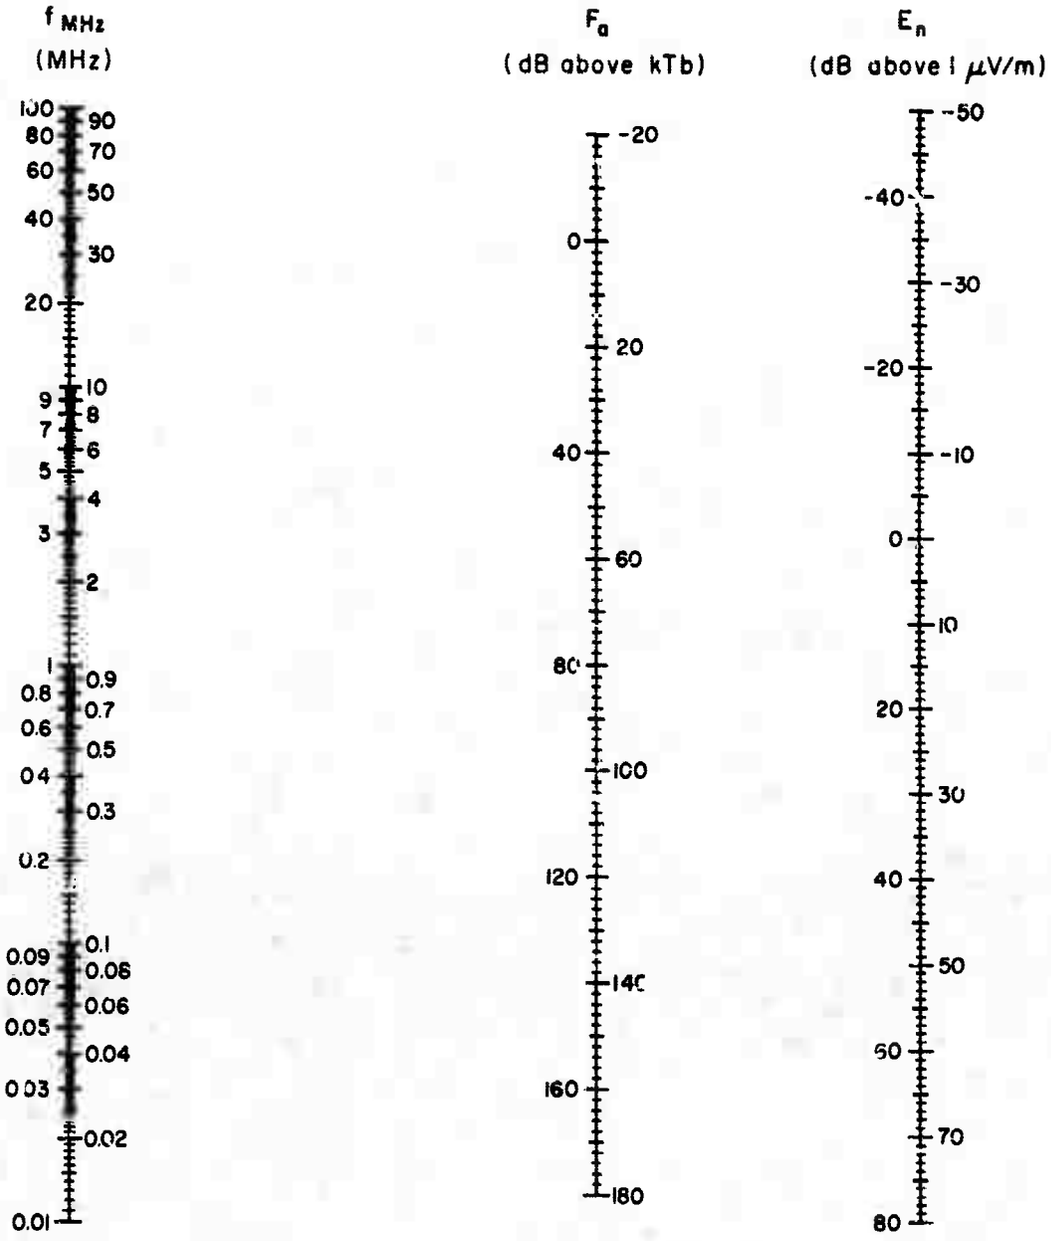

$$E_n = F_a + 20 \log_{10} f_{MHz} - 65.5$$

DB-4040-261

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in dB Above kTb.

E_n = Equivalent Vertically Polarized Ground Wave rms. Noise Field Strength in dB Above 1 μV/meter for a 1-kHz Bandwidth.

f_{MHz} = Frequency in MHz

Source: ESSA Tech. Report IER 18-ITSA 18-28

FIG. 4 NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

II DISCUSSION

The noise data contained in this report are compatible with the data in a series of Technical Notes published by ITSA,* (Series 18) "Quarterly Radio Noise Data." The following two parameters of the atmospheric noise are tabulated in the Appendix:

(1) Mean power

(2) Mean envelope voltage.

The mean power is a basic parameter and is expressed as an effective antenna noise factor, F_a. F_a is defined as the noise power available from an equivalent loss-free antenna in dB above kTb, the thermal noise power available from a passive resistance, where

k = Boltzmann's constant (1.38×10^{-23} joules per degree Kelvin)

b = Effective receiver noise bandwidth (Hz)

T = Reference temperature, taken as 288°Kelvin.

The mean envelope voltage, V_d, is expressed as a deviation in dB below the mean power.

Four frequencies, either in the MF and HF bands or in the VLF and LF bands, may be recorded simultaneously for 30 minutes. Switching between the two sets of four frequencies is accomplished automatically each half hour. The average power and the mean envelope voltage are recorded on an 8-channel strip-chart recorder. The thirty-minute samples are taken as representing the noise condition for the full hour.

The month-hour medians for power and voltage, F_{am} and V_{dm}, respectively, are determined from the hourly values scaled from the chart recordings for each of the corresponding frequencies. Normally, from twenty-five to thirty observations of the mean power are obtained monthly

---

* Institute for Telecommunication Sciences and Aeronomy, of the Institutes for Environmental Research, Environmental Science Services Administration, U.S. Department of Commerce.

for each hour of the day and from ten to fifteen observations of the voltage deviations. When there are fewer than fifteen observations of the mean power or seven observations of the voltage deviations, the tabulated values in the Appendix are identified by an asterisk.

The extent of the variation of the noise power from day to day at a particular hour of the day can be determined from the upper and lower decile values of F_a. These are expressed in dB above and below the month-hour median, F_{am}, and designated by D_u and D_l, respectively, in Table A-1.

Time-block median values of noise are tabulated on a seasonal basis and are obtained by averaging all month-hour medians for the four hours of the day within the three-month period (see Table A-2 and Fig. A-1). The time-block values conform to the seasonal time-block values used in CCIR Report No. 322.

The results of the noise measurements at MF and HF for the months March, April, and May 1966, are given in this report. No data for LF and VLF for these months are available, but it is expected that data for these frequency bands will be published in subsequent reports.

APPENDIX

RADIO NOISE VALUES

MONTH-HOUR VALUES OF RADIO NOISE

Station: LAEM CHABANG Lat. 13.05°N Long. 100.9°F Month Sept. 1967

Hr. (LT)	FREQUENCY (MHz)															
	0.53				2.3				5.0				10.0			
	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}
00	108	8	9	4.0	78	9	8	4.0	67	13	7	3.0	63	10	10	2.0
01	106	7	5	4.0	78	7	8	4.0	69	15	6	3.0	61	6	15	1.5
02	105	11	5	4.0	79	7	7	3.0	69	10	7	3.0	59	8	13	2.0
03	107	10	8	4.0	78	5	8	4.0	70	7	7	3.0	59	8	15	2.0
04	108	7	13	4.0	76	5	6	4.5	70	11	9	3.0	61	16	20	2.0
05	107	8	14	5.0	75	9	8	5.0	68	13	7	3.0	56	14	16	2.5
06	95	12	7	1.0	75	4	5	3.0	68	9	10	3.0	63	8	12	2.0
07	92	12	11	2.0	66	8	8	2.0	59	--	--	3.5	56	10	7	2.0
08	87	9	12	2.0	62	10	11	2.0	48	5	4	4.0	49	14	6	2.0
09	81	12	8	3.0	58	--	--	2.5	45	8	3	4.0	46	10	5	3.0
10	79	12	9	3.0	54	--	--	2.5	44	6	7	2.5	48	10	12	3.0
11	82	15	15	2.5	52	18	9	3.0	44	11	7	3.0	42	12	6	3.0
12	84	18	12	4.5	51	21	8	2.5	42	11	5	2.5	44	13	5	3.0
13	89	--	--	8.0	62	10	14	2.5	45	8	8	3.0	40	13	4	3.0
14	96	--	--	10.0	65	13	13	4.5	46	10	4	3.0	43	9	5	4.0
15	98	10	10	9.0	66	11	10	6.0	47	8	4	4.0	46	7	8	3.0
16	102	11	12	6.5	73	7	8	3.0	55	10	5	3.0	53	11	8	3.0
17	103	10	8	4.0	79	5	13	2.0	60	8	3	2.5	57	12	7	2.0
18	106	7	11	2.0	82	6	6	2.0	73	7	5	2.0	62	11	9	2.0
19	106	8	6	2.5	82	11	11	2.0	77	6	9	2.0	65	6	8	2.0
20	106	7	5	2.0	82	9	8	2.0	76	8	6	2.5	65	8	8	2.0
21	105	6	4	2.5	81	10	.	2.0	77	6	5	2.0	68	8	10	1.5
22	106	6	5	2.5	81	7	9	2.0	75	10	6	2.5	69	9	9	1.0
23	105	7	6	3.0	80	9	12	2.5	73	11	11	3.0	63	10	10	1.0

F_{am} = Median value of effective antenna noise in dB above kTb

D_u = Ratio of upper decile to median in dB

D_l = Ratio of median to lower decile in dB

V_{dm} = Median deviation of average voltage in dB below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station: LAEM CHABANG Lat. 13.05°N Long 100.9°E Month Oct. 1967

Hr. (LT)	FREQUENCY (MHz)															
	0.53				2.3				5.0				10.0			
	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}
00	102	7	7	2.5	77	4	9	5.0	62	6	4	4.0	56	11	7	4.0
01	102	6	5	4.0	76	5	6	6.0	65	13	8	5.0	57	13	8	4.0
02	104	8	6	4.0	77	9	7	6.0	64	10	5	6.0	57	18	9	4.0
03	104	5	8	5.0	76	12	7	7.0	63	11	4	5.0	54	14	6	4.0
04	104	8	8	5.0	76	8	9	8.0	63	7	6	6.0	55	6	8	4.0
05	102	7	7	5.0	76	11	9	7.5	63	7	5	5.5	51	15	6	4.0
06	95	5	10	2.0	72	11	7	5.0	59	10	4	6.0	57	14	5	4.0
07	92	12	5	2.0	67	14	9	4.0	53	10	4	7.5	53	9	6	4.0
08	87	9	11	2.0	60	14	8	4.0	49	--	--	7.0	44	11	7	4.0
09	76	14	6	4.0	57	7	13	4.5	40	10	5	6.0	46	10	7	3.5
10	73	15	9	3.5	56	--	--	6.0	39	10	6	4.5	46	8	7	4.0
11	71	20	3	2.0	51	14	9	5.5	39	8	5	3.5	44	14	6	4.0
12	79	12	13	3.0	51	13	8	3.5	39	7	5	4.0	42	10	7	3.5
13	79	15	11	8.0	56	14	13	7.0	40	6	7	4.0	41	7	5	4.0
14	81	21	12	8.0	59	13	9	6.0	43	5	5	5.0	46	8	9	4.0
15	87	13	12	7.0	61	10	9	7.0	43	9	5	5.0	46	9	8	4.0
16	90	16	12	5.0	68	8	11	4.0	52	10	4	4.0	57	4	11	4.0
17	98	9	13	3.5	71	9	7	4.0	58	8	5	4.0	53	7	5	4.0
18	100	6	8	2.0	76	12	12	3.5	67	6	2	5.5	57	10	6	4.0
19	101	10	10	2.0	77	9	10	3.0	69	6	3	4.0	59	8	5	4.0
20	98	10	7	2.0	80	8	10	3.0	71	7	4	4.0	63	5	6	3.5
21	99	9	7	2.0	80	7	12	4.0	73	2	8	4.0	64	4	7	4.0
22	100	11	7	2.0	77	11	8	4.0	68	6	5	4.0	63	7	8	3.0
23	100	7	6	2.0	76	7	8	5.0	65	8	6	5.0	61	7	9	3.5

F_{am} = Median value of effective antenna noise in dB above kTb

D_u = Ratio of upper decile to median in dB

D_l = Ratio of median to lower decile in dB

V_{dm} = Median deviation of average voltage in dB below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station: LAEM CHABANG Lat. 13.05°N Long. 100.9°E Month Nov. 1967

Hr. (LT)	FREQUENCY (MHz)															
	0.53				2.3				5.0				10.0			
	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}
00	99	7	5	3.0	73	15	7	4.0	63	4	4	5.5	57	12	8	5.0
01	99	7	5	3.0	73	16	8	5.0	65	7	7	5.0	53	12	5	5.0
02	99	6	5	4.0	74	14	7	4.5	63	9	10	5.0	56	10	9	5.0
03	99	6	7	4.0	73	15	5	5.5	64	9	4	5.0	54	7	9	5.0
04	99	7	7	5.0	74	13	8	7.5	63	8	4	6.0	50	18	11	5.0
05	95	7	5	6.0	71	19	5	7.0	64	9	8	6.0	49	19	7	4.5
06	93	5	8	2.0	66	13	7	4.0	60	11	8	5.0	52	8	10	4.5
07	94	5	4	2.0	65	10	11	3.0	56	5	7	5.0	49	12	6	5.0
08	88	8	5	2.0	60	14	7	2.0	46	12	7	6.0	41	14	3	6.0
09	85	10	13	2.5	57	15	8	2.5	42	11	3	5.0	44	11	8	4.5
10	83	11	12	3.0	55	10	9	2.0	39	6	3	3.0	*44	--	--	5.0
11	81	8	14	2.0	52	13	5	2.0	38	7	3	3.0	*45	--	--	4.0
12	82	9	9	2.0	52	17	5	2.0	39	4	4	3.0	*47	--	--	4.0
13	80	13	13	2.5	52	20	6	2.0	39	5	4	3.0	48	8	10	4.0
14	88	11	19	3.0	56	18	8	2.0	41	4	5	3.0	45	9	5	4.0
15	87	8	15	2.5	58	15	7	1.0	43	5	4	3.0	49	9	12	4.0
16	96	3	13	2.0	70	10	13	1.0	52	5	6	2.0	52	12	5	4.0
17	98	5	13	1.5	72	13	7	1.0	57	6	2	3.0	50	11	7	5.0
18	100	3	3	2.0	76	12	6	1.0	65	7	10	3.0	55	11	6	4.5
19	101	3	5	2.0	79	9	10	2.0	68	6	11	2.5	61	6	6	4.0
20	101	4	4	2.0	77	10	6	2.5	68	8	5	3.0	60	10	5	4.0
21	99	6	5	2.0	78	12	5	2.0	69	4	7	3.0	62	8	5	4.5
22	100	5	5	2.5	77	12	8	3.0	70	5	11	3.0	*61	--	--	4.5
23	100	5	5	3.0	75	12	6	4.0	67	7	5	4.0	59	9	8	4.5

*Fewer than 15 days data on power measurements and no computations made for D_u and D_l

F_{am} = Median value of effective antenna noise in dB above kTb

D_u = Ratio of upper decile to median in dB

D_l = Ratio of median to lower decile in dB

V_{dm} = Median deviation of average voltage in dB below mean power

THREE-MONTH TIME-BLOCK VALUES OF RADIO NOISE

Station: LAEM CHABANG, THAILAND Lat. 13.05°N Long. 100.9°E Period Sept.-Oct.-Nov. 1967

FREQUENCY (MHz)	TIME BLOCKS (LST)																							
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400			
	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}	F_{am}	D_u	D_l	V_{dm}
0.53	103	7	6	4.0	98	8	8	3.0	81	12	10	3.0	86	13	13	6.0	100	8	10	3.0	102	7	5	3.0
2.3	76	10	7	5.0	12	10	8	5.0	56	13	9	3.0	[illegible]	15	9	4.0	76	9	10	2.0	79	10	8	3.0
5	65	10	6	4.0	62	9	7	5.0	43	9	5	4.0	42	7	5	3.5	63	7	5	3.0	71	7	7	3.0
10	57	11	10	4.0	54	12	9	4.0	45	11	7	4.0	45	9	7	4.0	57	9	7	3.5	63	8	8	3.0

F_{am} = Median value of effective antenna noise in dB above kTb

D_u = Ratio of upper decile to median in dB

D_l = Ratio of median to lower decile in dB

V_{dm} = Median deviation of average voltage in dB below mean power

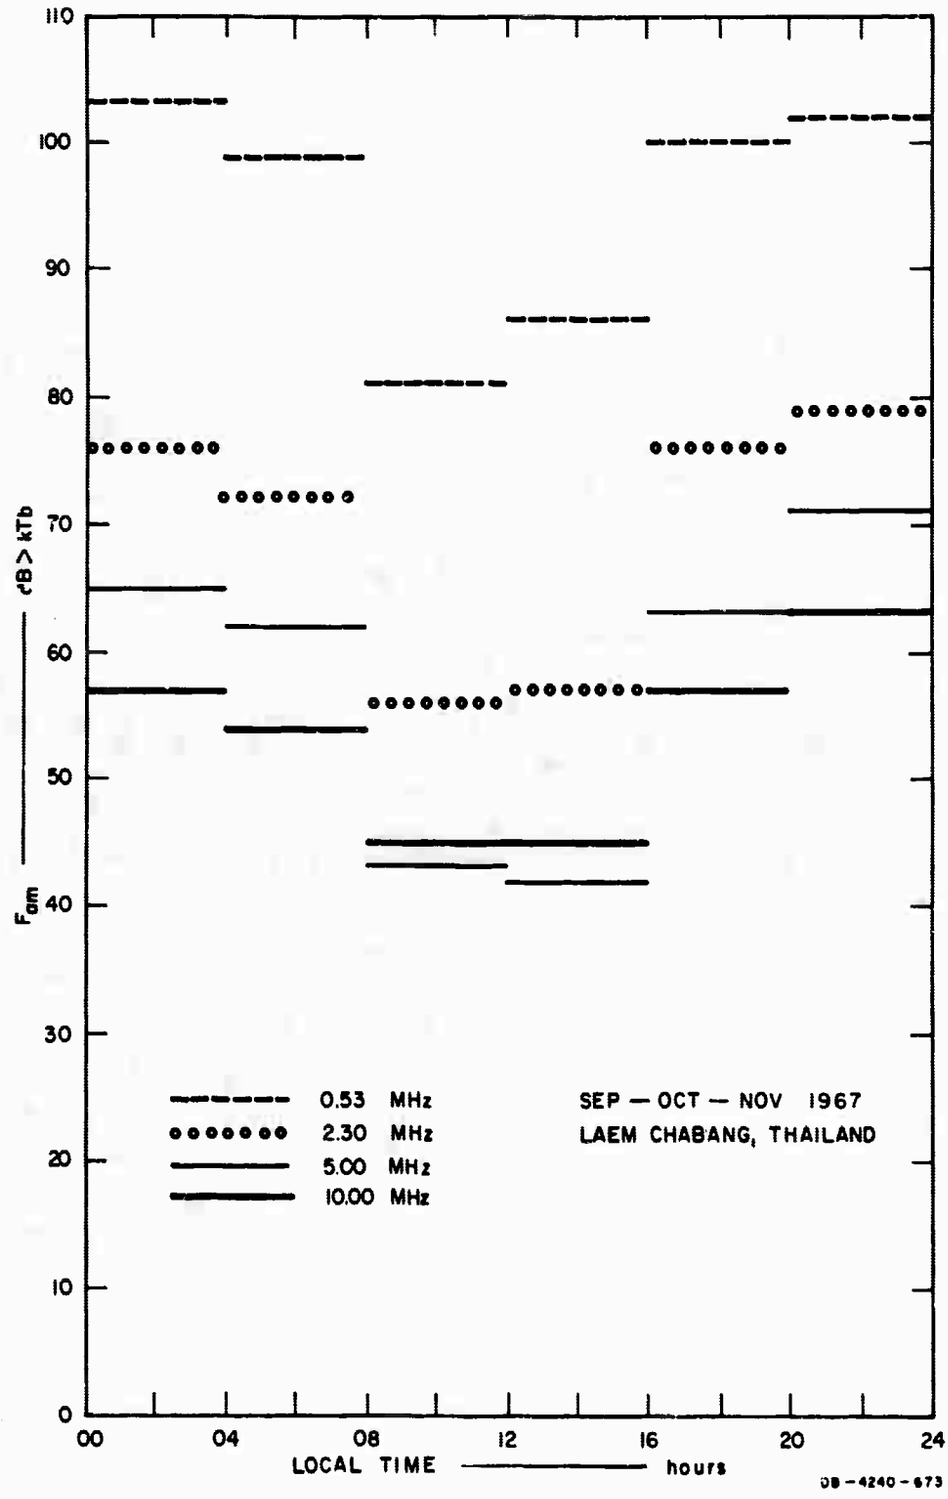

FIG. A-1 THREE-MONTH MEDIAN TIME-BLOCK VALUES OF RADIO NOISE POWER

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author)

Stanford Research Institute
Menlo Park, California 94025

2a. REPORT SECURITY CLASSIFICATION

UNCLASSIFIED

2b. GROUP

N/A

3 REPORT TITLE

ATMOSPHERIC RADIO NOISE DATA, BANGKOK, THAILAND—September-November, 1967

4 DESCRIPTIVE NOTES (Type of report and inclusive dates)

Geophysical Data Report Covering the Period September through November 1967

5 AUTHOR(S) (First name, middle initial, last name)

Rangsit Chindahporn, Ponsak Buasri

6. REPORT DATE	7a. TOTAL NO OF PAGES	7b. NO OF REFS
December 1967	21	

8a. CONTRACT OR GRANT NO	9a. ORIGINATOR'S REPORT NUMBER(S)
Contract DA-36-039 AMC-00040(E)	Geophysical Data Report
b. PROJECT NO. Order No. 5384-PM-63-91	SRI Project 4240
ARPA Order No. 371	
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)
d.	

10 DISTRIBUTION STATEMENT

Distribution of this report is unlimited.

11 SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
	Advanced Research Projects Agency Washington, D.C.

13 ABSTRACT

None: Data Report

DD FORM 1 NOV 65 1473 (PAGE 1)

S/N 0101-807-6801

UNCLASSIFIED

Security Classification

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Radio Noise						
Atmospheric Noise						
Radio Noise Recorder						
ARN-3						
VLF, LF, MF, HF						
Thailand						
SEACORE						